


Installing the Cat5 Secure Browser on Chromebooks


(Education Workspace License Required)

Note: Only School-owned computers with the required license will be able to download the Kiosk Application onto Chromebooks. Students who have purchased the Chromebook for themselves or schools without this license, will not be able to download this application. Devices must operate in 64-bit (older models in 32-bit are not compatible).


1. Log in to your administrative console at – <https://admin.google.com>
 - a) Select **Devices > Chrome > Apps & Extensions**. Click the **Kiosks** tab to the right.
 - b) Hover over the yellow “plus” option at the bottom right and click the top option **Add by URL**.

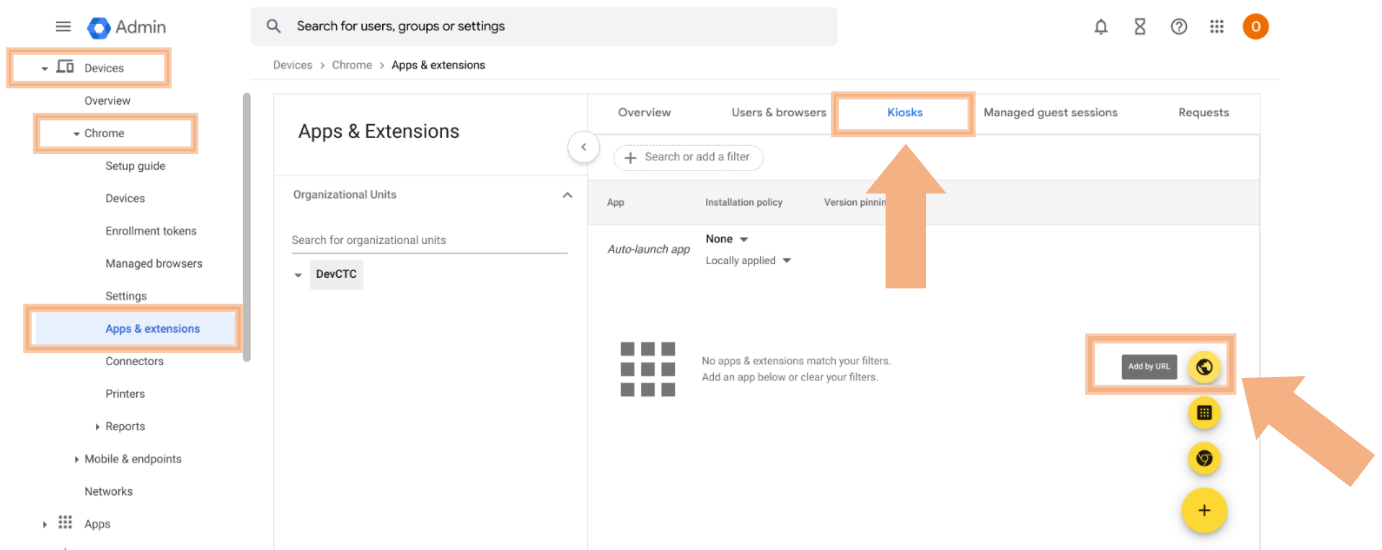

2. Enter the URL: <https://www.cat5edition.com/main/shared/pwa/index.html> then click **SAVE**.

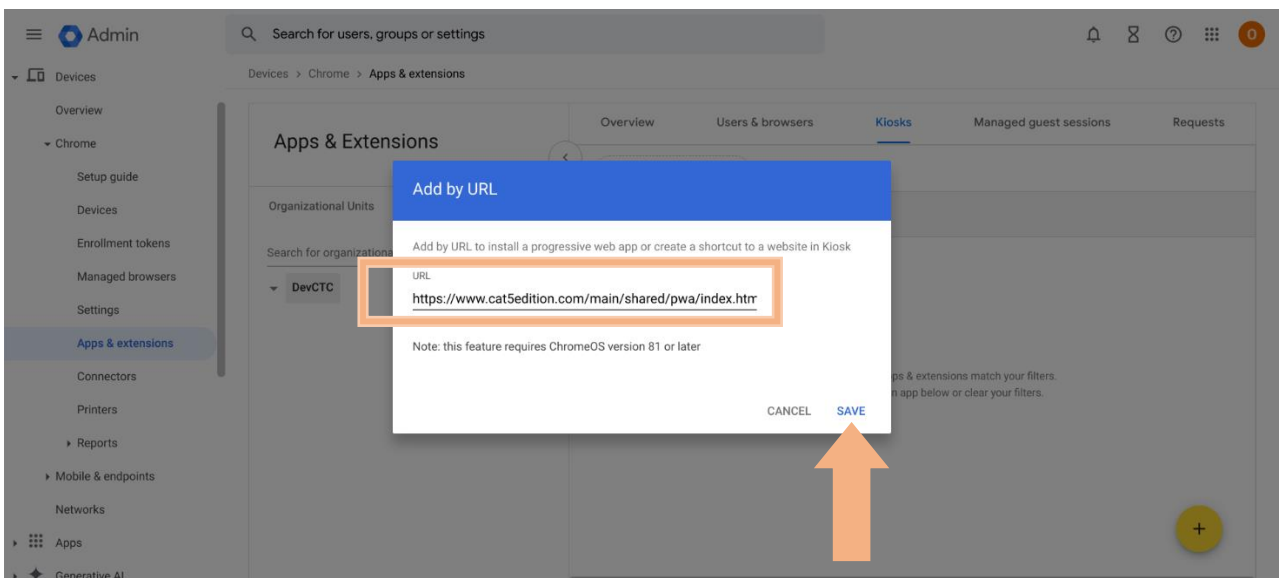


3. Once successfully installed, the app **CAT5 Lockdown Browser** should be listed in **Kiosks**.

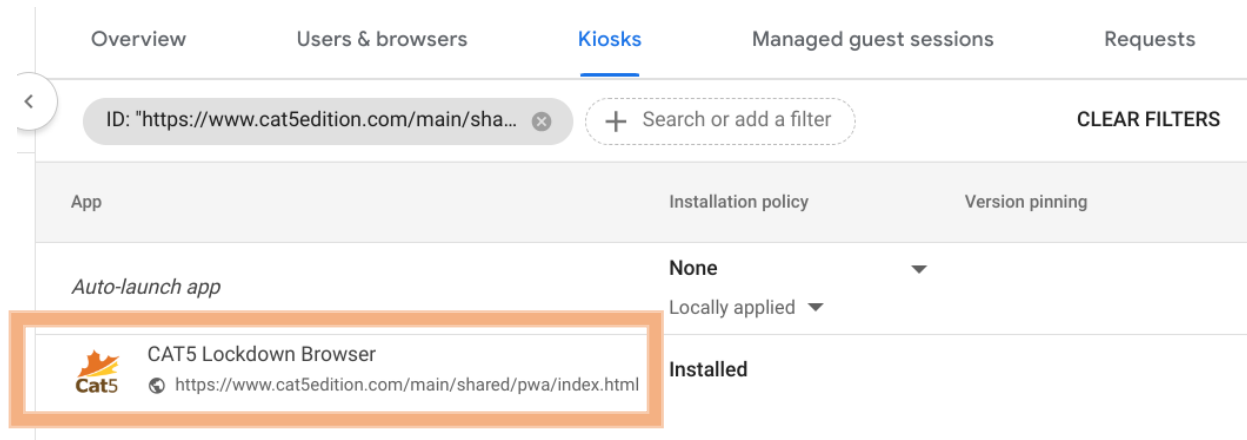

Note: If you have multiple devices for different grades at your school and only want to download the application for specific set of devices, ensure that you select the grade and specific serial numbers from your organizational unit. Otherwise, the app will not appear for the required devices.

See screenshot below as an example.

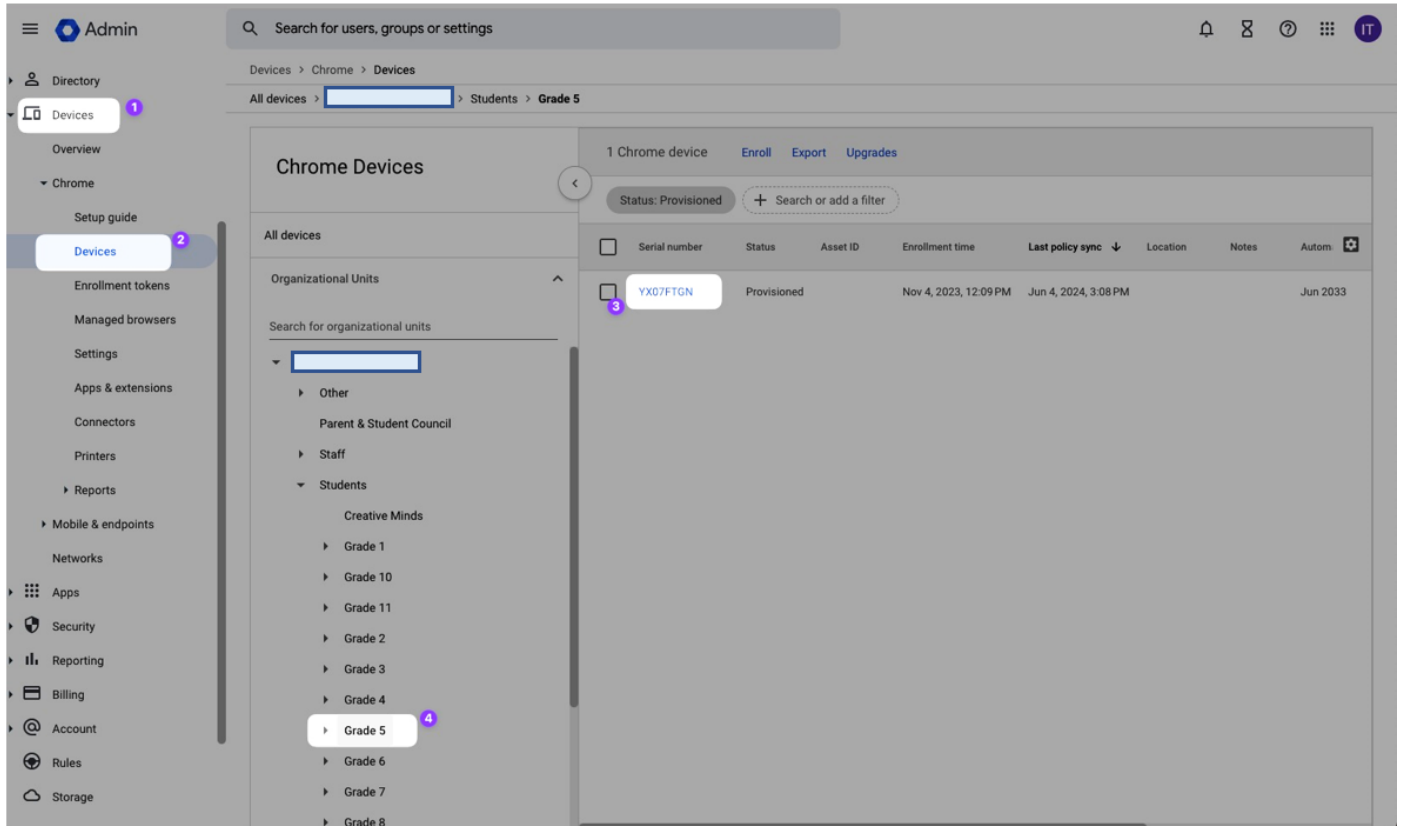



4. Ensure that Sleep mode is turned off in the idle settings to prevent the device going to sleep while students are idle during a test.

a) Go to **Devices > Chrome > Settings > User & browser Settings**


b) Scroll down to **Power and Shutdown**

c) Select **Idle Settings**

d) Once changed, click **Save**

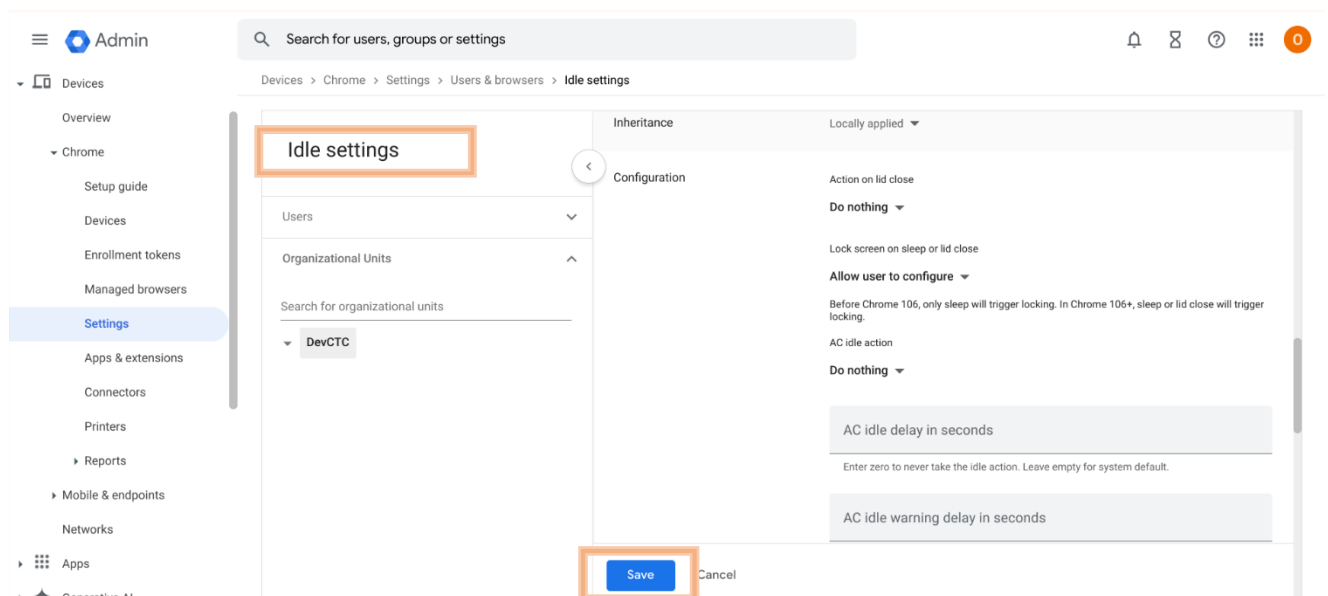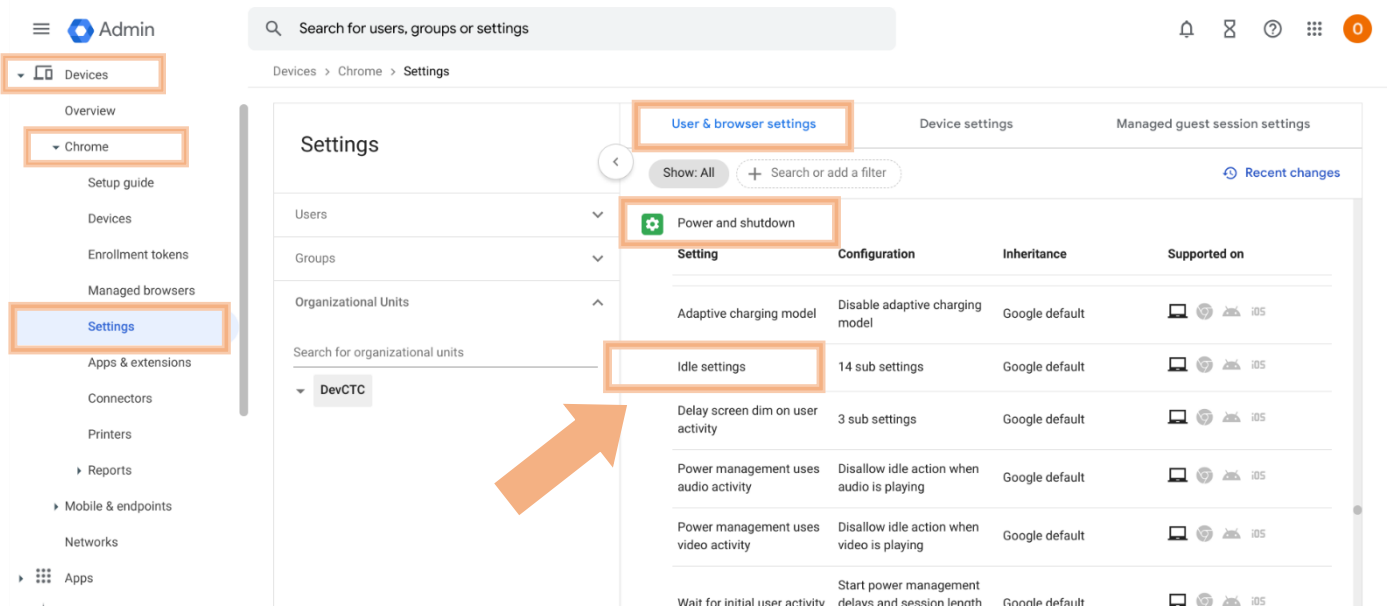

- To access the Lockdown browser, the student does not have to login to the Chromebook. The app can be found in the **Apps folder** located next to the **Shut down** button at the bottom left of the welcome screen.

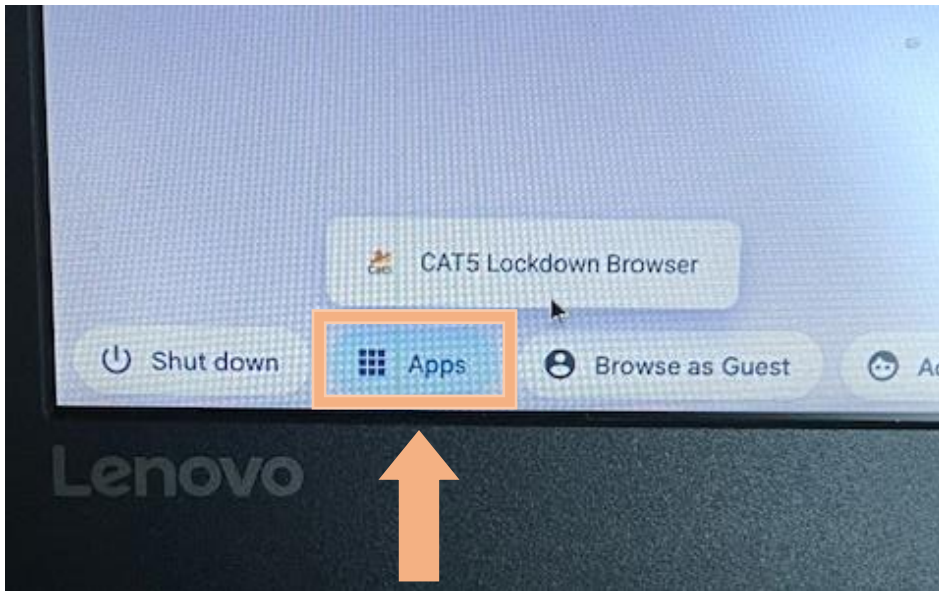

Note: If after the student submits the test and the Chromebook does not respond, the teacher can click the red “X” button at the top right corner or hold the power button briefly to get the two options “Shut down” and “Sign Out”.

